




TRANSFORMER ANGLE BUSHING

TBRA 22

Up to 24kV – 600A

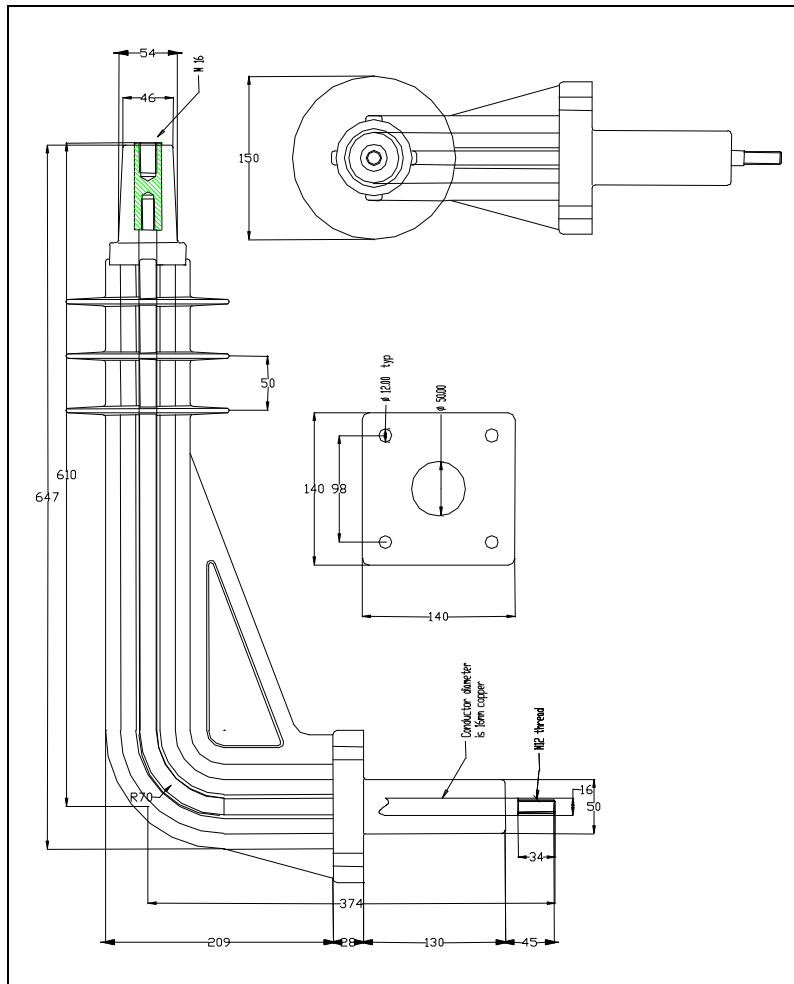

Application

For use in equipment insulated with oil fluid, typically transformers.

Design

Moulded PH-CEP* hydrophobic cycloaliphatic epoxy insulated part with a DIN taper primary connection.

Standards

EMCP bushings meet the characteristics of AS1265, 1990 and relevant IEC standards.

Quality

Each bushing is put through stringent quality assurance in line with the EMC Pacific ISO9001 Quality Management System.

Manufactured in Australia by EMC Pacific Pty Ltd, Dandenong, Victoria.

Specification and product design are subject to change without notice. All Information is accurate at time of printing.

Specification

*Permanent Hydrophobic Cycloaliphatic Epoxy Resin (patent applied)

Product No	TBRA 22
Highest Voltage for Equipment (kV)	24 kV
Line Voltage (kV)	22 kV
Max Current Rating (A)	600 A
Impulse Withstand Voltage (kV)	150 kV
Dry Power Frequency Withstand Voltage (kV)	50 kV
Wet Power Frequency Withstand Voltage (kV)	-
Creepage	Fully insulated
Weight	7.5 kg